


MICHELIN® XD MINEWORKS

27.00R49



**WORRY-FREE
DEPENDABILITY**

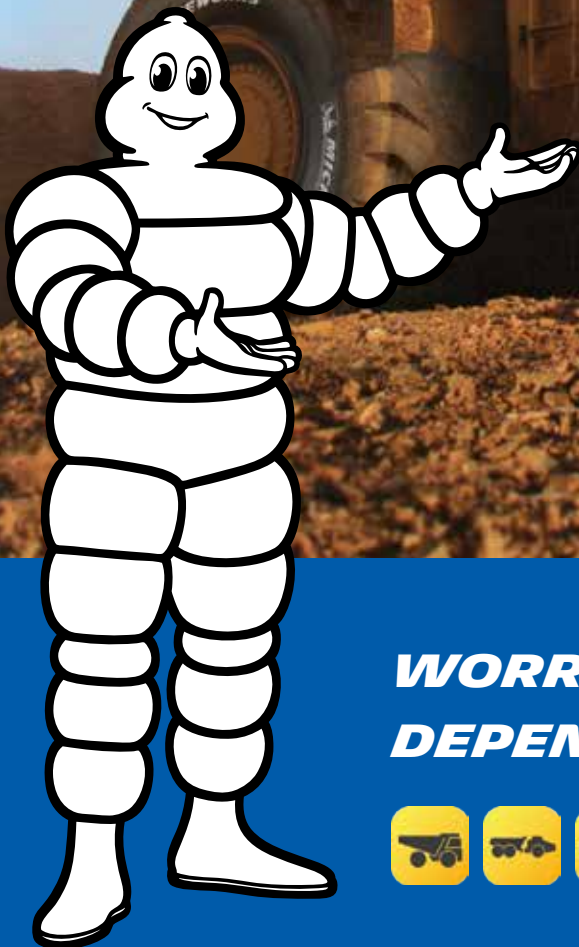

BACKED BY MICHELIN'S HISTORY OF PERFORMANCE



Michelin has a strong heritage when it comes to supporting mines, quarries and contractors. The MICHELIN® XD MINEWORKS tire was built with high-quality innovations you know and trust. It was created:



**BY A TEAM OF
GLOBAL EXPERTS**



**UTILIZING THE LATEST
DESIGN PRINCIPLES**



**WITH ADVANCED
CASING AND COMPOUND
TECHNOLOGIES**



**TO ADDRESS THE AGGRESSIVE,
EVERYDAY NEEDS OF MINES
AND QUARRIES**



A TIRE THAT WORKS, WITHOUT HAVING TO WORRY

The 49" MICHELIN® XD MINEWORKS tire is designed with a new tread pattern and tread depth to deliver even wear for 100-ton mining and quarry dump trucks.




***WORRY-FREE PRODUCT
EXPERIENCE***



***MINIMAL MAINTENANCE
(DESIGNED FOR MINIMAL ROTATION)***



BUILT FOR PEACE OF MIND



HANDLE HEAVY LOADS

at .5 bar less than competitor tires¹ thanks to tough cables and innovative architecture



DESIGNED FOR GOOD BALANCE

between TKPH and wear resistance, even at high speeds, thanks to the "high wear resistance" compound






PROTECT AGAINST AGGRESSION

with a tough non-directional tread design that features even wear and minimized stone retention

1. This data comes from the MICHELIN® Data Book and Bridgestone® OTR Databook 2019.

MARKET OFFERINGS FOR HARD SOIL

The MICHELIN® XD MINEWORKS tire offers the same load capacity as Bridgestone's offerings, but at a lower pressure. Here's how this tire competes in the market:

	BRIDGESTONE VRLS & VREP	GOODYEAR RL4H	MICHELIN XD MINEWORKS
			
Star Rating:	**	**	**
TRA Code:	E4	E4	E4
Tread Depth (mm):	66.5 mm	64 mm	66 mm
Load Capacity (kg):	27,250 kg	27,250 kg	27,250 kg
Pressure Bar:	7.0	7.0	6.5
TKPH:	415 2A, 513 1A Compound (VRLS) 457 2A, 564 1A Compound (VREP)	385 4S, 500 2S Compound	545

* This data comes from the MICHELIN® Data Book, the Bridgestone® OTR Data Book 2019, and the 2020 Goodyear® Data Book

TIRE SPECIFICATIONS

COMMERCIAL DESCRIPTION	CAI MSPN	Max. dist./hour km mile	TKPH TMPH	e mm inch	D mm inch	R" mm inch	RC mm inch	Tread depth mm 32rd	Dual spacing mm inch	Cap. liter gallon	Measuring recommended rim	Other approved rims
XD MINEWORKS ** E4R 27.00 R 49 Tubeless	716130 83794	25 15.5	545 373	735 28.9	2672 105.2	1206 47.0	8068 318	66 83.2	892 35.1	1970 520.5	19.50/4.0[3.2]	19.50/4.0[2.7]
Bar	3.5	4	4.5	5	5.5	6	6.5					
Psi	51	58	65	73	80	87	94					
Machine Use (kg - lbs)	TRANSPORT											
STANDARD	16850	18550	20300	22050	24000	25500	27250					
	37154	40903	44762	48620	52920	56228	60086					

* Reference MICHELIN® Data Book 2019 for more information



Copyright ©2020 Michelin North America, Inc. All Rights Reserved.
The Michelin Man is a registered trademark owned by Michelin North America, Inc.

